


Description

Flex Glow Neon is a LED linear fixture, for indoor and outdoor lighting applications. It is moisture resistant, and provides a uniform and neon-like brightness, to easily highlight architectural details. It is also available with a colored outside jacket, matching the color of the LED lamp, allowing visible color without the LED being powered.

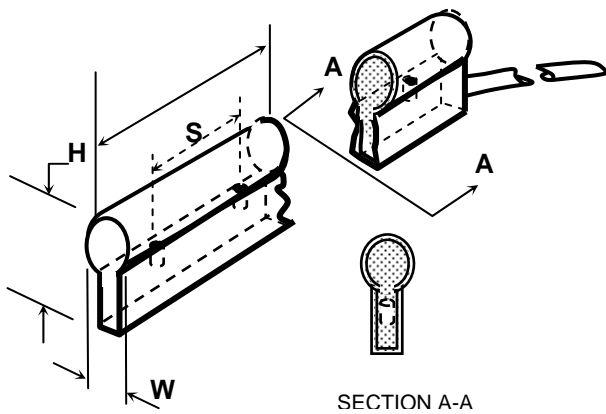

Specifications

LED Spacing: ½ inch (S)

Power Supply: 120V AC with 1.6Amp or 4 Amp converters

Rated Lamp Life: 50,000 hours

Bend Radius: 1 ½ inch (4cm)

Dimensions: ½" W x 1" H
(12mm x 26mm)

Roll Length: 30 feet or 150 feet


IP Rating: 67

Listing: UL

LED Color	Power Usage / ft.	Cutting Interval (L)	Maximum Run Length w/1.6A Converter	Maximum Run Length w/ 4A Converter	Color Temp.	High Output White Jacket	High Output Lumen /ft.	Standard Output Colored Jacket	Standard Output White Jacket	Standard Output Lumen/ft.
Cool White	1.2W	1.5 ft.	159 ft.	300 ft.	5,000K	✓	15.2	✓	✓	7.0
Warm White	1.2W	1.5 ft.	159 ft.	300 ft.	2,200K	✓	17.3	N/A	N/A	N/A
Green	1.2W	1.5 ft.	159 ft.	300 ft.	N/A	✓	9.0	✓	✓	6.0
Blue	1.2W	1.5 ft.	159 ft.	300 ft.	N/A	✓	4.8	✓	✓	1.3
Red	1.2W	2.5 ft.	200 ft.	400 ft.	N/A	✓	8.3	✓	✓	3.4
Yellow	.96W	2.5 ft.	200 ft.	500 ft.	N/A	✓	7.3	✓	✓	3.6
Orange	.96W	2.5 ft.	200 ft.	500 ft.	N/A	✓	8.4	✓	✓	4.2

Catalog Numbers			
LED Color	High Output/ White Jacket	Standard Output/ White Jacket	Standard Output/ Colored Jacket
Cool White	MFH120VCW	MFS120VCW	N/A
Warm White	MFH120VWW	MFS120VWW	MFC120VWW
Green	MFH120VG	MFS120VG	MFC120VG
Blue	MFH120VB	MFS120VB	MFC120VB
Red	MFH120VR	MFS120VR	MFC120VR
Yellow	MFH120VY	MFS120VY	MFC120VY
Orange	MFH120VO	MFS120VO	MFC120VO

Ordering Example: MFH120VCW

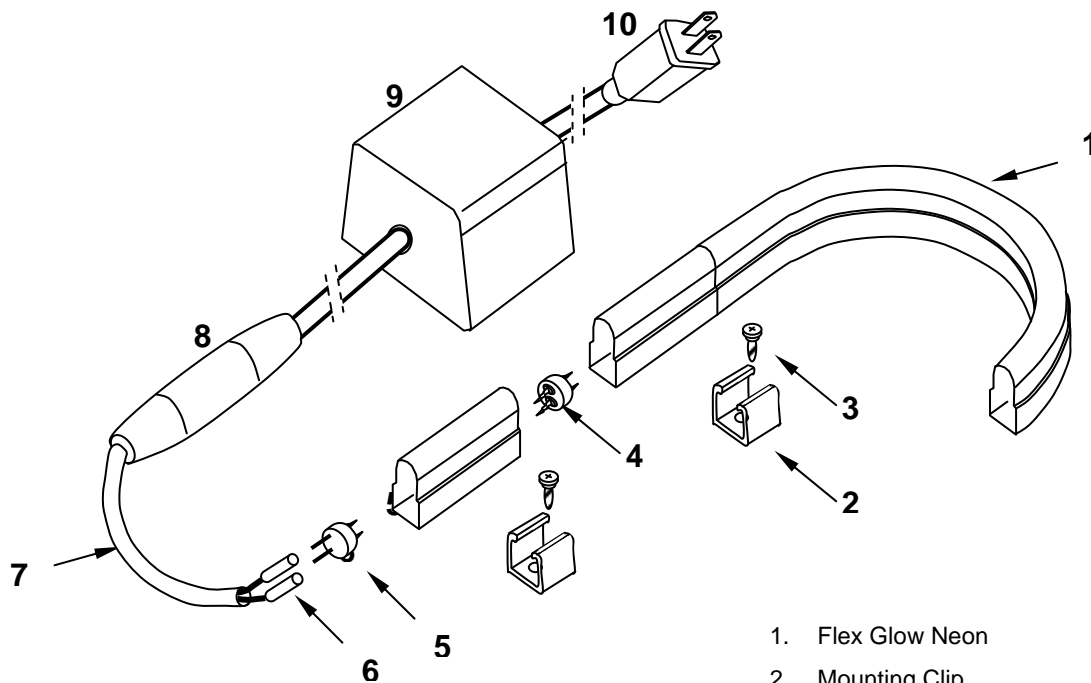

1. Flex Glow Neon
2. Mounting Clip
3. Screw
4. Splice connector
5. Splice Connector
6. Female Connector
7. Power Cord
8. Converter for line voltage power supply
9. Adapter for low voltage power supply
10. Plug