


Specifications

- Core:** Multi-Strand PMMA Fiber
- Outer Jacket:** Transparent PVC cladding
- Outside Diameter (O.D.):** 3.5mm, 3.8mm, 5.2mm
- Spool Length:** See chart below
- Bend Radius:** Minimum 6 x fiber diameter
- Acceptance Angle:** 60°
- Numeric Aperture:** 0.60
- Attenuation:** Less than 1.6% per foot
- Operating Temperature Range:**
 - Minimum -67°F (-55°C)
 - Maximum 158°F (70°C)

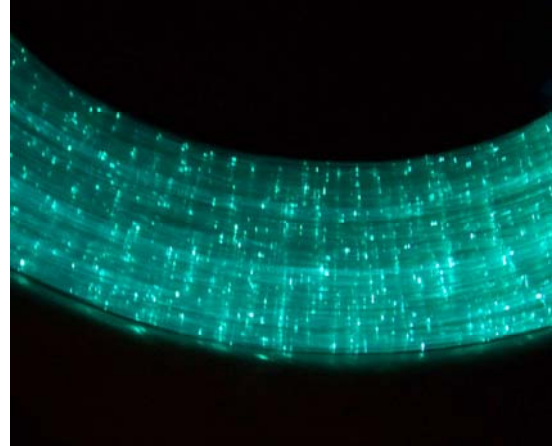

The Sparkle fiber is 0.75mm PMMA fiber with a clear PVC cladding for UV protection. The fiber is distressed at 3cm intervals, allowing a "sparkle" effect to be created.

The fiber cable is available from 3.5mm – 5.2mm diameter. Spool lengths 100, 200 and 500 feet.

Applications

- Chandeliers
- Special Effects
- Waterfall Curtain

Catalog No.	Description	Diameter	Length
MOFSSS-3x75	3 x 75mm fibers	3.5mm	100, 200 or 500 feet
MOFSSS-7x75	7 x 75mm fibers	3.8mm	100, 200 or 500 feet
MOFSSS-14x75	14 x 75mm fibers	5.2mm	100, 200 or 500 feet

Ordering Example: MOFSSS-3-75-500